


PART NUMBER	REV	A	B	C	D	ØE	ØF	DETAIL		COMMENT
								H	DIM	

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
N/C	RELEASED		

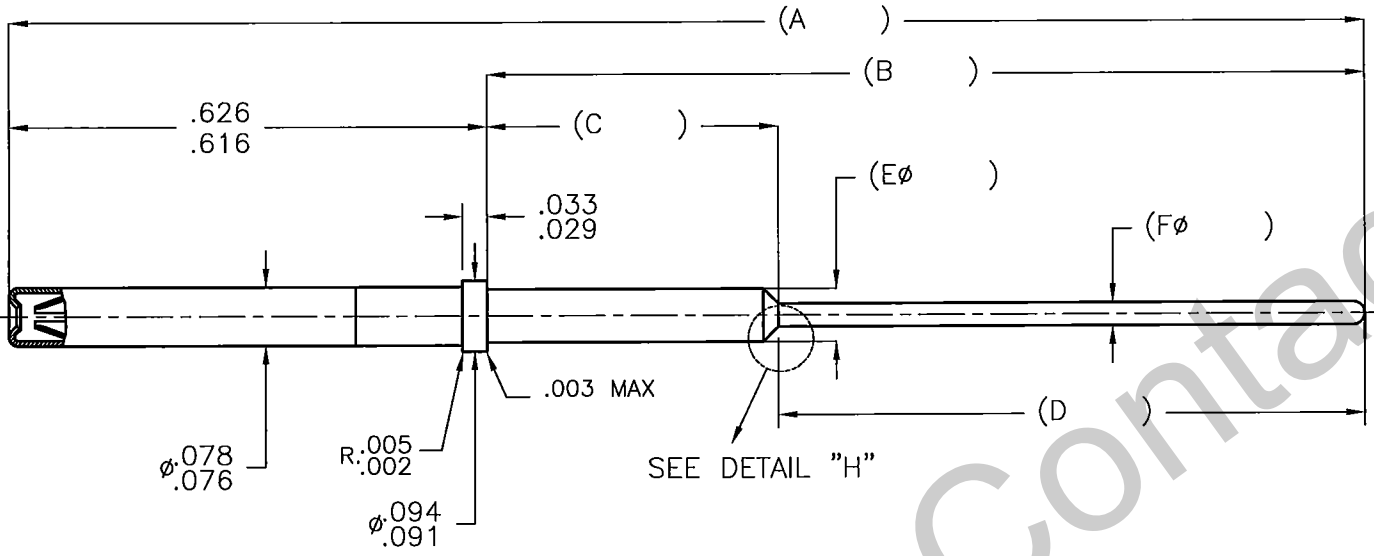


ENGAGEMENT & SEPARATION		
	SEPARATION	ENGAGE.
MIN.	.7 OZ. 19.9 GRAM	N/A
MAX.	N/A	22.0 OZ. 624 GRAM
GAGE PIN	MS3197-20X1 Ø.0391/.0390	MS3197-20Y1 Ø.0410/.0409
DEPTH	.145	.135

- CONTACT MEETS OR EXCEEDS SPECIFICATION AND REQUIREMENTS OF MIL-C-39029/56-351, EXCEPT AS INDICATED HEREIN.
- CONTACT SHALL MEET THE SOLDERABILITY REQUIREMENTS OF MIL-STD-202, METHOD 208
- ALL DIAMETERS ON A COMMON CENTERLINE ARE TO HAVE A CIRCULAR RUNOUT OF .002 MAX.
- DIMENSIONS SHOWN ARE AFTER PLATING.
- FINISH: .000050 THICK MINIMUM GOLD PER MIL-G45204, TYPE II, GRADE C, CLASS 1 OVER .000050-.000100 THICK SULFAMATE NICKEL PER QQ-N-290, CLASS 2, OVER .000015 THICK MINIMUM COPPER PER MIL-C-14550.

⚠ MATERIAL: A. SUITABLE COPPER ALLOY (LEADED NICKEL COPPER).  
 B. BeCu (WITH HEAT TREATMENT)  
 C. CHROMEL.  
 D. ALUMEL.

1. INTERPRET DRAWING PER ASME-14.5M - 1994.  
 NOTES: UNLESS OTHERWISE SPECIFIED.

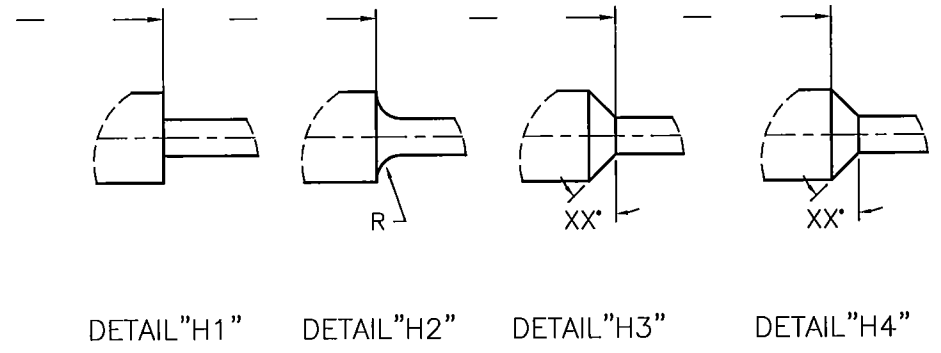

**Aerospace  
Contacts LLC**

THIS DOCUMENT IS ISSUED IN STRICT CONFIDENCE ON THE CONDITION THAT IT IS NOT TO BE USED AS THE BASIS FOR MANUFACTURING OR SALE, AND THAT IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE WRITTEN CONSENT OF AEROSPACE CONTACTS, LLC.

REFERENCE: MIL-C-39029/56-351

MATING CONTACT: MIL-C-39029/58

TYPE: CONTACT

DRAWN	SzL	01.01.2009
CHECKED		
APPROVED		

DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 DECIMALS:  
 .XX = ±.005  
 .XXX = ±.003

ANGLES:  
 ±1°

CONTACT #20 MASTER  
 SOCKET/PC

CAGE:	1	SHEET OF 1	PART NUMBER	ACLCC
-------	---	------------	-------------	-------