


| REVISIONS | | | |
|-----------|-------------|------|----------|
| REV | DESCRIPTION | DATE | APPROVAL |
| N/C | RELEASED | | |
| | | | |


| PART NUMBER | REV | A | B | C | D | ØE | ØF | DETAIL | | COMMENT |
|-------------|-----|---|---|---|---|----|----|--------|-----|---------|
| | | | | | | | | H | DIM | |
| | | | | | | | | | | |

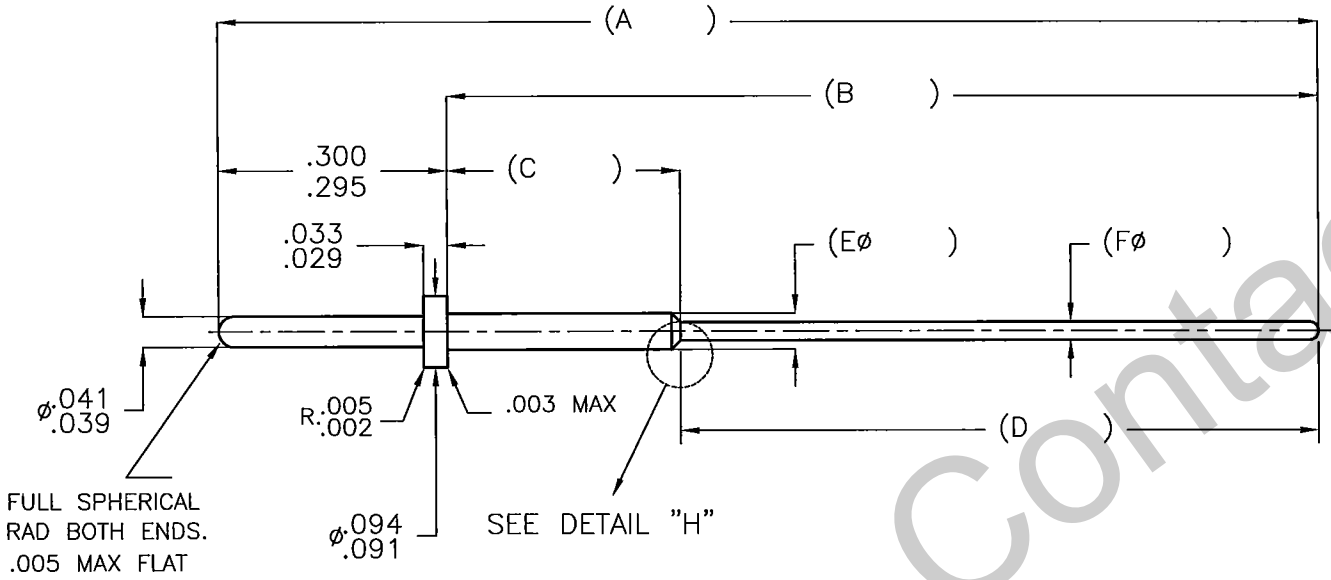

- CONTACT MEETS OR EXCEEDS SPECIFICATION AND REQUIREMENTS OF MIL-C-39029/58-363, EXCEPT AS INDICATED HEREIN.
- CONTACT SHALL MEET THE SOLDERABILITY REQUIREMENTS OF MIL-STD-202, METHOD 208
- ALL DIAMETERS ON A COMMON CENTERLINE ARE TO HAVE A CIRCULAR RUNOUT OF .002 MAX.
- DIMENSIONS SHOWN ARE AFTER PLATING.
- FINISH: .000050 THICK MINIMUM GOLD PER MIL-G45204, TYPE II, GRADE C, CLASS 1
 OVER .000050-.000100 THICK SULFAMATE NICKEL PER QQ-N-290, CLASS 2,
 OVER .000015 THICK MINIMUM COPPER PER MIL-C-14550.

MATERIAL: A. SUITABLE COPPER ALLOY (LEADED NICKEL COPPER).
 B. BRASS 360 1/2 H.
 C. C17300 BERYLLIUM COPPER TD04

1. INTERPRET DRAWING PER ASME-14.5M - 1994.
 NOTES: UNLESS OTHERWISE SPECIFIED.

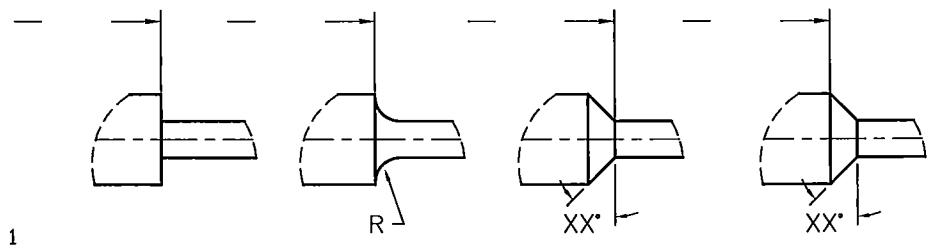

DETAIL "H1" DETAIL "H2" DETAIL "H3" DETAIL "H4"

Aerospace Contacts LLC

THIS DOCUMENT IS ISSUED IN STRICT CONFIDENCE ON THE CONDITION THAT IT IS NOT TO BE USED AS THE BASIS FOR MANUFACTURING OR SALE, AND THAT IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE WRITTEN CONSENT OF AEROSPACE CONTACTS, LLC.

REFERENCE: MIL-C-39029/58-363

MATING CONTACT: MIL-C-39029/56 or 57 TYPE: CONTACT

| | | |
|----------|------|----------|
| DRAWN | SzL | 01.01.09 |
| CHECKED | K.B. | |
| APPROVED | | |

DIMENSIONS ARE IN INCHES
 TOLERANCES:
 DECIMALS: ANGLES:
 .XX = ±.005 ±1°
 .XXX = ±.003

| | | |
|--------------------------------|--------------|-------------------|
| CONTACT #20 MASTER PIN/P.C. | | |
| SCALE: 10:1 | 1 SHEET OF 1 | PART NUMBER ACLLC |